

MPW-260

MPW-260R

MPW-260RH



MPW - 260

SPEED	4000	0
RCF	2486	0
TIME	00:02:00	00:02:00

MPW MED. INSTRUMENTS

SHORT START STOP COVER

BACK 15SEC


PDF





	MPW-260	MPW-260R	MPW-260RH
	230V 50/60Hz; 120V 50/60Hz (option 100, 110, 127V 50/60Hz)	230V 50Hz; 230V 60Hz; 120V 60Hz (option 100, 110, 127V 60Hz)	230V 50Hz; 120V 60Hz (option 100, 110, 127V 60Hz)
	230 W	530 W	700 W
	500 ml	500 ml	500 ml
	90 + 18 000 RPM, step 1RPM	90 + 18 000 RPM, step 1RPM	90 + 18 000 RPM, step 1RPM
RCF max.	24 270 x g, step 1 x g	24 270 x g, step 1 x g	24 270 x g, step 1 x g
	1s + 99h 59min 59s + -, step 1s	1s + 99h 59min 59s + ∞, step 1s	1s + 99h 59min 59s + ∞, step 1s
	315 x 365 x 495mm [HxWxD]	315 x 365 x 660mm [HxWxD]	315 x 365 x 660mm [HxWxD]
	-	(-20°C + +40°C <sup>1</sup> ), step 1°C	(-20°C + +55°C <sup>1</sup> ), step 1°C
	22,5/24,6kg [230V/120V]	42,2/44,3kg [230V/120V]	43,9/46,1kg [230V/120V]
Cat. No.	10260/2-56 [230V 50/60Hz] 10260/1-56 [120V 50/60Hz]	10260R/2-5 [230V 50Hz] 10260R/2-6 [230V 60Hz] 10260R/1-6 [120V 60Hz]	10260RH/2-5 [230V 50Hz] 10260RH/1-6 [120V 60Hz]

**MPW-260, MPW-260R and PW-260RH centrifuge** is a family of universal, table, medium-sized centrifuges. The accuracy of setting high centrifugation parameters with the possibility of their registration, and the availability of high-speed angular rotors (RCF above 14,000 x g) and low-speed horizontal rotors (RCF below 6,300 x g), as well as the variety of accessories allow the centrifugation of samples from 0.2 ml to 100 ml (including hematocrit capillaries). Thus, centrifuges are used, among others, in blood preparatory procedures and urinalysis in medical and veterinary laboratories, in molecular biology for isolation, purification and evaluation of the quality of DNA and RNA nucleic acids in scientific and biochemical laboratories, for sludge dewatering in laboratories of environmental protection and sewage treatment plants, and many others.

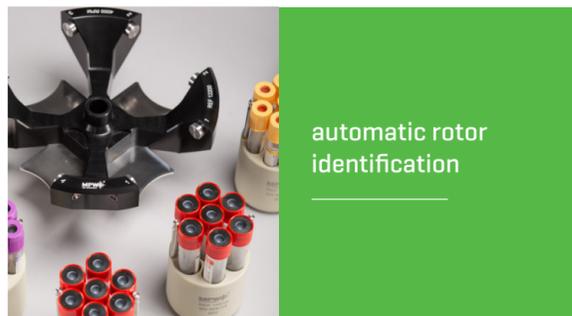

	RCF		
18 000	24 270	12 x 2/1,5ml	11199
5 500	4 227	8 x 50ml Falcon®	11213
14 000	19 064	12 x 5ml	11216
6 000	4 226	10 x 15/10ml	11217
15 100	21 158	24 x 2/1,5ml	11461
14 000	18 188	36 x 2/1,5ml	11462
4 500	3 011	30 x 15/10ml	11501
14 000	15 339	10 x 10ml	11715
14 000	15 338	4x8 x 0,2ml	11716
6 300	5 014	4 x 100ml	11718
5 500	4 058	12 x 15/10ml	11740
6 000	4 226	8 x 15/10ml	11741
4 500	2 717	12 x 30/25ml	11743
4 500	2 830	10 x 50ml	11744
5 000	3 354	24 x 15/10ml	11745
6 000	4 427	6 x 50ml	11746
14 600	20 257	24 x 2ml	11760
12 000	13 684	20 x 1,8ml	11943
12 000	13 684	12 x 5ml	11944
4 000	2 504	4 x 100ml	12200
3 000	916	2x1 MTP	12218
13 000	16 816	24 capillaries 75mm	12300

Ø x L, mm	BLOOD COLLECTION TUBES										MICRO TUBES						
	BD Vacutainer® Vacuette®	BD Vacutainer® Vacuette®	BD Vacutainer® Vacuette®	S-Monovette®	Eppendorf® Snap Cap	Eppendorf® Snap Cap	Eppendorf® Snap Cap	PCR	Cryo	PCR	PCR						
2,5-11; 7-9											5						
4-7; 3,5-6																	
1,6-5,3; 1-4,5																	
7,5-8,2; 8,5-9;10																	
4,9;5,6																	
4;4,3;5,5																	
4,5;5																	
2,7;3;4; 4,3																	
2,6;2,8; 3,4;3,8																	
1,6;2; 2,7;3; 3,1																	
17 x 66																	
17 x 54,2																	
10,8 x 41,8																	
7,3 x 77,2																	
12,3 x 46,5																	
6 x 21,6																	
7,8 x 31; 5,7 x 48,6																	

Ø x L, mm	UNIVERSAL TUBES																		SPECIAL PURPOSE TUBES			GLASS TUBES				
	Falcon®	Falcon®	Naligene®	Naligene®	Naligene®	Naligene®	Naligene®	Naligene®	Sterilin® Skirted	skirted type	plastic type	capillaries	MTP	Arthrex ACP®	44 x 100; 45 x 100	25 x 100	16 x 100	12 x 100	12 x 75							
30 x 117																										
17 x 120																										
29 x 102; 28,8 x 106,7																										
25,5 x 94,3																										
25,4 x 103,2																										
25,4 x 101,8																										
16 x 113																										
16 x 81,5																										
25 x 94																										
30 x 115																										
45,2 x 103,7																										
25,5 x 94																										
16,8 x 113,7; 16 x 106																										
16 x 100																										
17 x 70																										
11,5 x 92																										
12 x 85																										
1,4 x 75																										
86 x 128 x 15/17,5																										
b.d.																										
44 x 100; 45 x 100																										
25 x 100																										
16 x 100																										
12 x 100																										
12 x 75																										

<sup>1</sup> Time and possibility of obtaining a set temperature is dependent on multiple factors, including: established RPM, rotor type, ambient temperature.

Technical specification subject to change. MPW MED. INSTRUMENTS is not responsible for printing mistakes. Falcon® is a registered trademark of Corning Incorporated, NY, USA. Naligene® is a registered trademark of Nalge Nunc International Corporation, Rochester, USA. S-Monovette® is a registered trademark of Sarstedt AG & Co. Eppendorf® is a registered trademark of Eppendorf AG. Vacuette® is a registered trademark of Greiner Bio-One. Vacutainer® is a registered trademark of Becton Dickinson.

## FEATURES

effective ventilation system [MPW-260]

with cooling [MPW-260R]

with cooling and heating [MPW-260RH]

temperature +4°C ensured for maximum speed of each rotor [MPW-260R; MPW-260RH]

delayed start function

start when preselected temperature is reached [MPW-260R; MPW-260RH]

initial cooling without/with centrifuging, cooling after centrifuging, precise temperature stabilization [MPW-260R; MPW-260RH]

maintenance-free induction motor

modern software system

large graphic LCD [MPW-260RH] - blanking the screen after a period of inactivity

preselected and real values of speed, RCF, time shown on the display at the same time [MPW-260]

preselected and real values of speed, RCF, time and temperature shown on the display at the same time [MPW-260R; MPW-260RH]

100 user programs

10 acceleration/deceleration curves

programming of multi-section acceleration/deceleration curves

RPM/RCF adjustment

two modes of time calculation: from start key pressing or from reaching preselected speed

continuous operation mode - HOLD

SHORT time operation mode

manual centrifugal radius adjustment [with automatic RCF correction]

possibility of changing of parameters during centrifuging

automatic rotor identification

automatic lid opening

menu language setting [PL, EN, ES, IT, PT, DE, RU, SE, FR, CZ]

selected functions blocking, password protection

manual adjustment of density of samples >1,2g/cm<sup>3</sup> [with automatic maximum speed correction]

stainless steel rotor chamber

## SAFETY

unbalance sensor

lid locking during rotor running

start blocking at opened lid

emergency lid lock release

product conforming with the EN-61010-1 and EN-61010-2-020, EN-61010-2-101 standards

# WYROBY MEDYCZNE DLA PROFESJONALISTÓW MEDICAL DEVICES FOR PROFESSIONAL USE ONLY



PN-EN ISO 9001  
PN-EN ISO 13485



PRODUCENT WIRÓWEK LABORATORYNYCH  
MANUFACTURER OF LABORATORY CENTRIFUGES

**MPW MED. INSTRUMENTS**

ul. Boremlowska 46 | 46 Boremlowska Street  
04-347 Warszawa, Polska | 04-347 Warsaw, Polska

[www.mpw.pl](http://www.mpw.pl)